



Commercial Gas Bakery Depth Convection Oven

Model	# Ovens	#Burners	Gas
IR-6B-C	1	6	N

STANDARD FEATURES

Construction

- Stainless steel front, sides, backslash and over shelf
- Heavy duty steel frame
- Removable, easy to clean cast iron top grates
- Removable crumb tray
- Cast iron burners
- 6" caster kit included – two with lock, two without
- 3/4" rear NPT gas connection
- 115VAC, NEMA 5-15P, 5.9 Amps

Oven Features

- 32,000 BTU convection oven burner
- Cool to touch oven door handle
- Two adjustable oven racks per oven cavity
- Compression spring door system
- Flame failure safety device
- Nano Porcelain chip resistant oven liner
- Temperature range from 250°F - 550°
- Holds full size sheet pans

Control

- High performance and efficient cast iron burners each giving off 30,000 BTU/hour
- Instant light flame adjustable control knobs
- Individual pilot lights
- Pus in knob with efficient Hi-Low burner system
- LPG conversion kit included



SPECIFICATIONS


The Iron Range Commercial Gas Range with Convection Oven has powerful 30,000 BTU cast iron burners. Each burner has an individual pilot light heavy-duty removable cast iron grate and individual instant light control knob. It is constructed with a stainless steel front, sides, 24.75" high back riser and over shelf, 6" casters, and a 3/4" NPT gas connection. Units are shipped for natural gas but are easily converted to LPG (propane) gas with the LPG conversion kit that is included.

All ranges carry ETL approval for gas and sanitation that pass USA requirements for use in food service.



IMPORTANT INFORMATION:

- A convertible pressure regulator is provided with this unit.
 Natural Gas 4.0" (102 mm) W.C.
 Propane Gas 10.0" (279 mm) W.C.
- Gas connection is NPT (19mm) rear gas connection
- Voltage: 115VAC, 5.9 Amp, NEMA 5.15P 6' Power cord

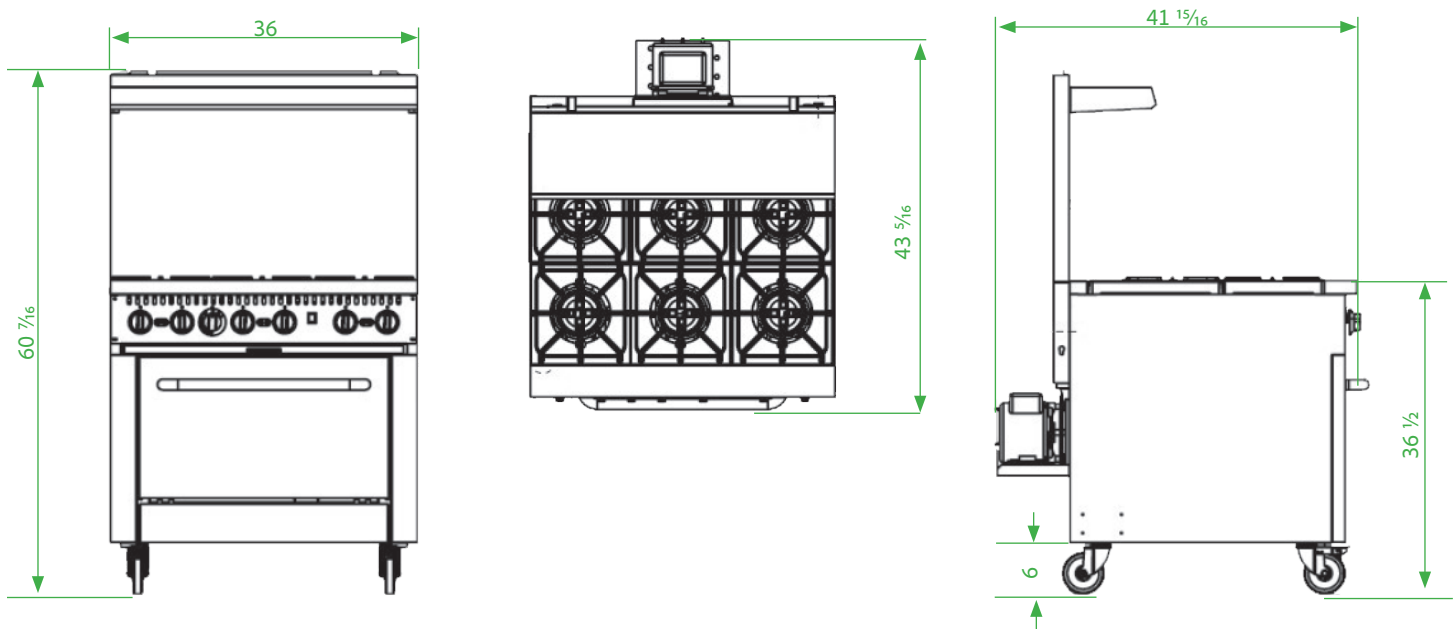

Model	Burners	External Dimensions			Internal Oven Dimensions			BTU's (per burner)	BTU's (convection oven burner)	Total BTU's	Crated Weight
		W	D	H	W	D	H				
IR-6B-C	6	36	43 5/16	60.3	26.8	26.4	13.7	30,000	32,000	212,000	485

Specifications are subject to change without notice.